



- ◀ BOAT DOCKS ▶
- ▶ HIKING TRAILS ▶
- ▶ NATURE PATHS ▶
- ▶ SWIM PLATFORM ▶





Make a connection to Life

Give visitors to your park sturdy, safe footing on boat docks, swim platforms, and various walkways with Connect-A-Dock. Its 5 minute (per module) attachment system means easy installation, and the strong polyethylene construction ensures many years of dependable service.

It's so versatile, you can use the Connect-A-Dock system modules wherever safe footing is required, even on land. Connect-A-Dock is ideally designed for today's user-friendly facility! Let us help you find a dealer in your area

Total Versatility Combined With Quality

Connect-A-Dock floating dock systems are versatile — the modules can be configured end to end or side to side, as long and wide as you wish and for many different applications or configurations on water or land.

Its 5 minute (per module) attachment system means easy installation and the rotationally molded polyethylene construction ensures many years of dependable service.



Applications

- Boat ramp launch dock
- Walkway in marshy wetlands
- Fishing dock for parks
- Airplane docks for fly-in fishing
- Swim platforms
- Moorings for boats
- Marine boat slips
- Ideal in fluctuating water levels

Benefits

- Modular design
- Easy to install
- Wood grain anti-skid surface
- UV protected
- Environmentally friendly
- Does not contain CCA
- Salt water safe
- 8-Year product warranty

Let us help you find a dealer in your area — 877-742-3071 | 712-243-2430 | connectadock.com




It's Easy and Fast to Install —



Plan Your Own Installation With These Components

The total design versatility of Connect-A-Dock means that every dock is unique! Plan your own installation with these basic components. For a look at our complete Connect-A-Dock product line, visit our web site at connectadock.com.

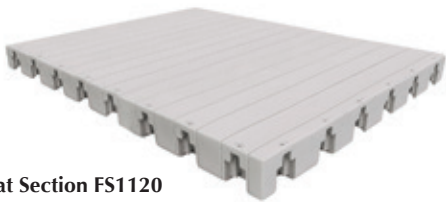

Float Section FS1120
1000 Series – Low Profile

90" x 120" x 10" (228.6 cm x 304.8 cm x 25.4 cm)
Maximum flotation: 2800 lbs (1270 kg) per module
Freeboard: 8" (20.32 cm) above the water



Float Section FS2120
2000 Series – High Profile

72" x 120" x 20" (182.9 cm x 304.8 cm x 51 cm)
Maximum flotation: 4800 lbs (2177 kg) per module
Freeboard: 17" (43.18 cm) above the water




Extra Flotation
Provides added buoyancy



Finishing Connector
Smooths out the dock edge



Float Connector
Connects float modules together

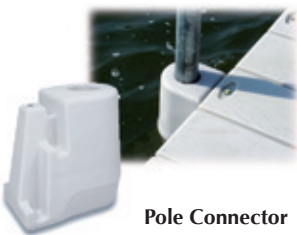

Pole Connector
Anchors dock with pipe



2000 Series Bumper
Attaches in the float section sockets



Dead Man Collar
Fits into pole connector



Piling Loop
Anchors to existing piling poles



Gangway
4' x 4', 4' x 8' and 4' x 12' sizes
Pre-assembled panels and light weight aluminum frame



2000 Series Bench
Designed to seat two people comfortably



Power Pedestal
Water & Electrical



Cleat
Boat tie-down

Dock Boxes
Five sizes



Swim Ladder
Aluminum



Guardrail
For safety


Modular Floating Dock Systems

1501 Owner Avenue
Atlantic, Iowa 50022
connectadock.com
Connect-A-Dock Inc
@floatingdocks



PWC Drive On

157" x 58.5" x 23" (398.8 cm x 148.6 cm x 58.4 cm)
Maximum flotation: 1700 lbs (771 kg)
Weight: 340 lbs (154.2 kg)

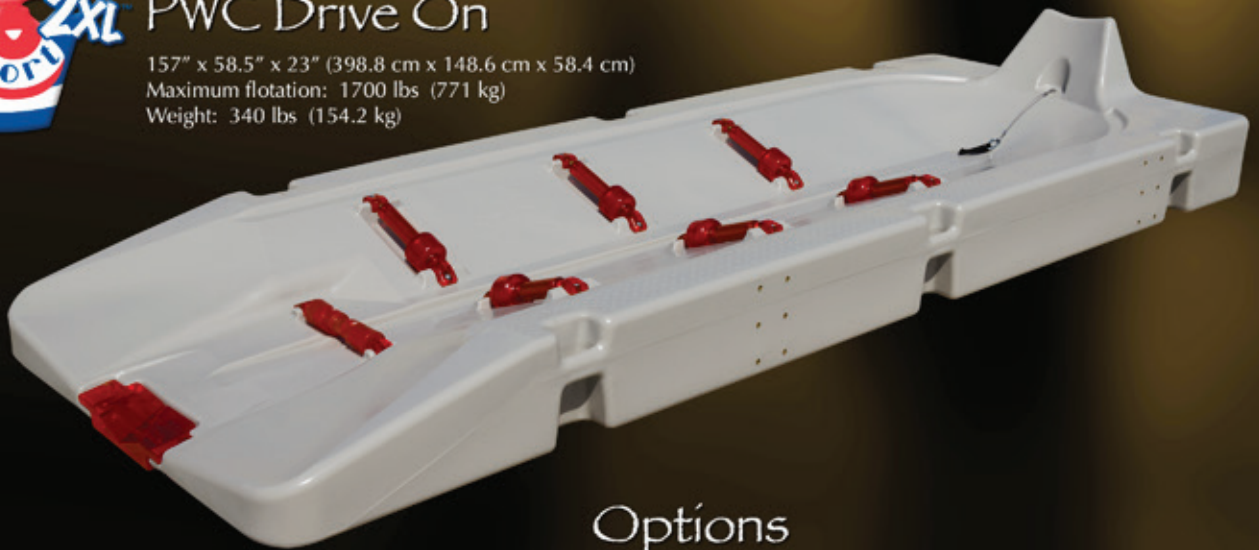

Features

- One-, Two- or Three-place personal watercraft
- Ultra Tough, Polyethylene Construction
- One Keel Roller & Block
- Six Bow Rollers
- Patented Bow Stop
- Cable & Clip for securing PWC
- Multiple Molded-in Tie Down Handles
- Anti-skid Walk Area
- Universal Hull Support
- Front or Side Mounting
- 5-Year product warranty

Options

- Mooring to Connect-A-Dock 2000 Series (Front or Side)
- Connecting hardware to link multiple units
- Attachment kit for fixed docks
- Bow Stop Winch
- Five Colors

